



AMBERLITE™ XAD7HP

Industrial Grade Polymeric Adsorbent

Introduction

AMBERLITE XAD7HP is a polymeric adsorbent, supplied as white insoluble beads. It is a non ionic aliphatic acrylic polymer which derives its adsorptive properties from its patented macroreticular structure (containing both a continuous polymer phase and a continuous pore phase), high surface area and the aliphatic nature of its surface (Figure 2). This macroreticular structure also gives AMBERLITE XAD7HP polymeric adsorbent excellent physical and thermal stability. Due to its aliphatic nature, AMBERLITE XAD7HP polymeric adsorbent can adsorb non polar compounds from aqueous systems, and can also adsorb polar compounds from non-polar solvents.

Properties

Matrix	Macroreticular aliphatic crosslinked polymer
Physical form	White translucent beads
Moisture holding capacity	61 to 69 %
Shipping Weight	655 g/L
Specific gravity	1.06 to 1.08
Particle size	
Harmonic mean size	0.56 - 0.71 mm
Uniformity coefficient	≤ 2.0
Fines content	< 0.300 mm : 7.0 % max.
Coarse beads	> 1.18 mm : 8.0 % max.
Maximum reversible swelling	see Table 1
Surface area	≥ 380 m ² /g
Porosity	≥ 0.50 ml/ml

Suggested Operating Conditions

pH range	0 - 14
Maximum temperature limit	80 to 100°C
Minimum bed depth	75 cm
Flow rate	
Loading	2 to 16 BV*/h
Displacement	1 to 4 BV/h
Regeneration	1 to 4 BV/h
Rinse	2 to 16 BV/h

Figure 1 : Chemical structure of AMBERLITE XAD7HP polymeric adsorbent

Figure 2 : Pore distribution of AMBERLITE XAD7HP polymeric adsorbent

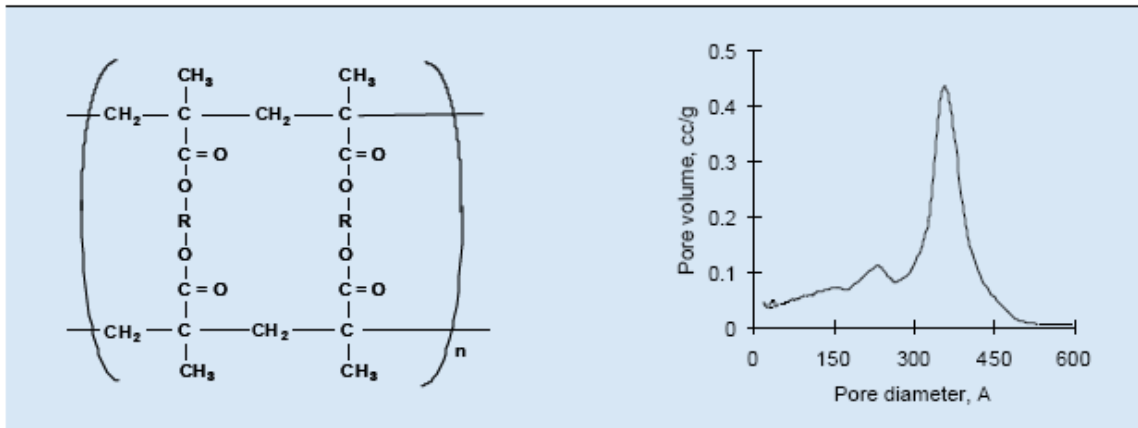


Figure 3 : Infrared Spectrum of Amberlite XAD7HP polymeric adsorbent

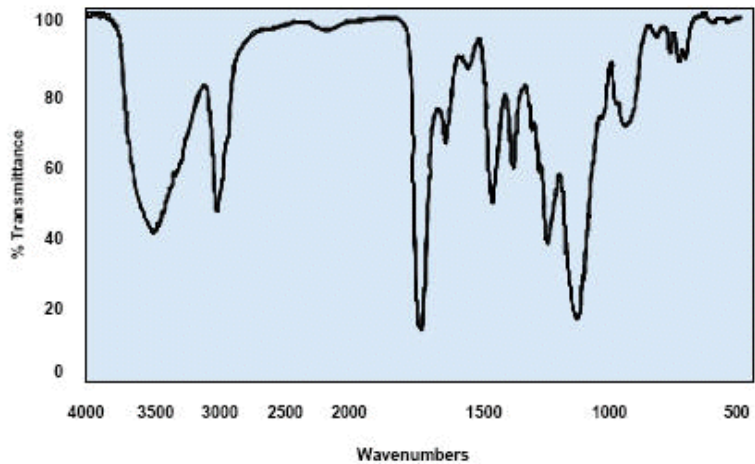


Table 1: Percent swelling of Amberlite XAD7HP polymeric adsorbent in various solvents (Water: Solvent)

Solvent	% Increase from as-received volume
Methanol	< 5
2-propanol	< 5
Acetone	< 5
p-Xylene (via methanol)	1

Pretreatment

AMBERLITE XAD7HP polymeric adsorbent is shipped as a water wet product imbibed with sodium chloride (NaCl) and sodium carbonate (Na₂CO₃) salts to retard bacterial growth. These salts must be washed from the adsorbent prior to use and it is suggested that this be achieved by washing with water at a linear flowrate of 5 - 10 m/h until the required level is achieved. In some sensitive applications, residual monomeric or oligomeric compounds may be required to be removed from the adsorbent. A regeneration with the proposed regenerant is also recommended prior to beginning the first service cycle. If the regenerant is an alcohol, it must be displaced with water prior to beginning the first loading cycle.



Sample preparation for testing

Samples of Amberlite XAD7HP polymeric adsorbent must be pre-treated prior to laboratory testing to ensure proper results. Please refer to Rohm and Haas publication IE-245 "Laboratory Column Procedures and Testing of Amberlite and Duolite Polymeric Adsorbents," section "Preparation of Resins."

Applications

Removal of relatively polar compounds from nonaqueous solvents.

Due to the chemical nature of its surface, AMBERLITE XAD7HP has proved a useful adsorbent for slightly polar compounds from nonpolar solvents such as MIBK etc. In these applications, the regeneration is efficiently performed with a NaOH solution.

Removal of non-aromatic compounds from polar solvents.

Based on the principal that "like attracts like," AMBERLITE XAD7HP can be used to adsorb compounds which have a similar chemical structure from an aqueous solution. Proposed compounds would be ester, ketones or aliphatic molecules.

Recovery of plant extracts.

The relatively large pores of AMBERLITE XAD7HP make it an ideal candidate for the adsorption of large molecules from plant extracts or other natural sources. Elution and/or regeneration can be performed either with solvents, buffers or steam depending on the type of molecule under consideration.

Recovery of antibiotics, enzymes and proteins.

Due to the chemical nature of its surface, AMBERLITE XAD7HP is the choice for the adsorption of peptides & proteins which would otherwise be damaged by adsorption onto an aromatic adsorbent such as AMBERLITE XAD16 or AMBERLITE XAD1180. Similarly, small molecules lacking halogen atoms or many C=C bonds could be adsorbed by AMBERLITE XAD7HP.

Removal of organic pollutants from aqueous wastes, ground water and vapor streams.

AMBERLITE XAD7HP is used for decolorization of bleach plant effluents from kraft pulp mills.

Enzyme immobilization.

The relatively large pores of AMBERLITE XAD7HP make this resin a ideal candidate for the immobilization of enzymes.

Regenerants/ Eluting agents

- Water miscible organic solvents (methanol, ethanol, acetone, isopropanol, etc.) for hydrophobic compounds.
- Pure solvents for regenerating resin fouled by oils and antifoams.
- Dilute bases (0.1 - 0.5% NaOH) for eluting weakly acidic compounds.
- Strong bases (2 - 4% NaOH) for regenerating resins fouled with proteins, peptides.
- Dilute acids (0.1 - 0.5% HCl) for weakly basic compounds.
- Dilute oxidising agents (< 0.5%) such as peroxide to enhance the removal of protein fouling.
- Buffer elution for pH sensitive compounds.
- Water where adsorption is from an ionic solution.
- Hot nitrogen or steam for volatile materials.



Hydraulic Characteristics

Figure 4 shows the bed expansion of AMBERLITE XAD7HP as a function of backwash flow rate and water temperature.

Figure 5 shows the pressure drop for AMBERLITE XAD7HP as a function of service flow rate and water temperature. Pressure drop data are valid at the start of the service run with a clear water and a correctly classified bed.

Figure 4 : Bed Expansion


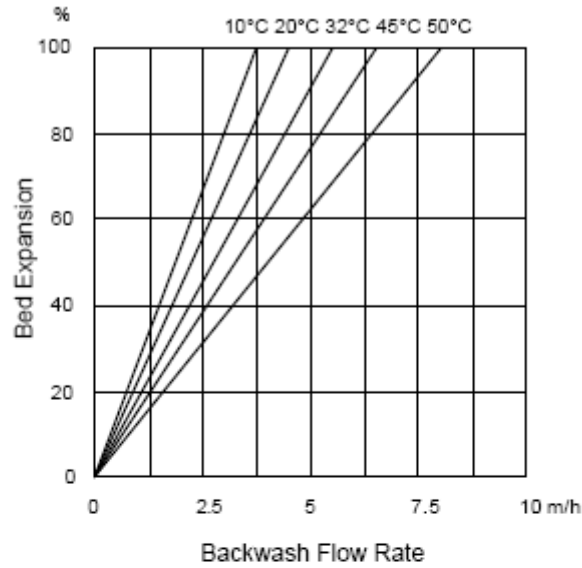


Figure 5 : Pressure Drop

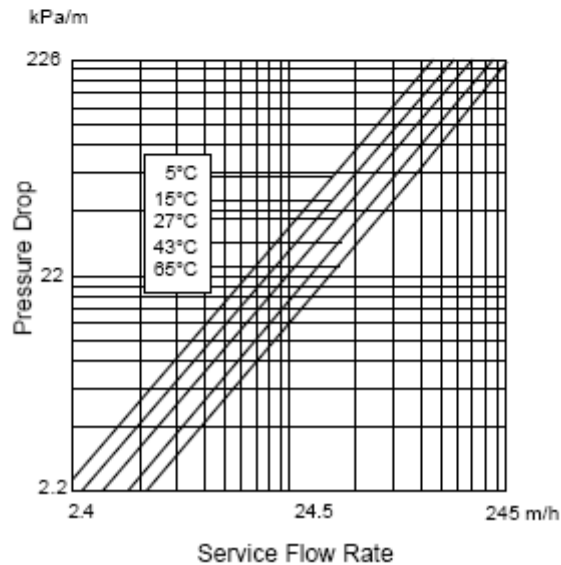

Material safety data sheets

Material Safety Data Sheets (MSDS) are available for all Amberlite polymeric adsorbents. These sheets contain pertinent information that you may need to protect your employees and customers against any known health or safety hazards associated with our products.

We recommend that you obtain copies of our MSDS from your local Rohm and Haas technical representative before using our products in your facilities. We also suggest that you contact your suppliers of other materials recommended for use with our products for appropriate health and safety precautions before using them.

For more information about DOW™ resins, call the Dow Water & Process Solutions business:

North America: 1-800-447-4369
Latin America: (+55) 11-5188-9222
Europe: +800-3-694-6367
Italy: +800-783-825
South Africa: +0800 99 5078
Pacific: +8007776 7776
China: +400 889-0789

<http://www.dowwaterandprocess.com>

Notice: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

