



## DOWEX™ MONOSPHERE™ 550A (OH)

Uniform Particle Size Strong Base Anion Exchange Resin

for Mixed Bed Demineralization and Condensate Polishing Applications

For the Power Industry

### Description

DOWEX™ MONOSPHERE™ 550A (OH) is a premium quality gel anion resin with high total exchange capacity, exceptional bead integrity and a distinguishable light color. It is ideally suited to the high flow rate demands commonly encountered in power plant condensate polishing systems. The bead size uniformity of this anion resin and its smaller average particle size results in rapid exchange kinetics and helps provide excellent separability when used with DOWEX MONOSPHERE 650C (H) Cation Resin.

### Typical Physical and Chemical Properties

Physical form		White to cream translucent spherical beads
Matrix		Styrene-DVB gel
Functional group		Quaternary amine
Total volume capacity, min. <sup>[2]</sup>	eq/L	1.1
	kgr/ft <sup>3</sup> as CaCO <sub>3</sub>	24.0
Moisture Retention Capacity	%	55–65
Particle size		
Harmonic mean diameter	µm	590 ± 50
Uniformity coefficient, max.		1.1
> 850 µm, max.	%	5
< 300 µm, max.	%	0.5
Whole uncracked beads, min.	%	95
Friability		
Average, min.	g/bead	350
> 200 g/bead, min.	%	95
Ionic conversion		
OH <sup>-</sup>	%	94 min.
Cl <sup>-</sup>	%	0.5 max
CO <sub>3</sub> <sup>-</sup>	%	6 max
Trace metals, dry resin, max.	ppm	Na (50); Fe (80); Cu (40); Al (40); Heavy metals [as Pb] (20)
Total swelling (Cl <sup>-</sup> ↔ OH <sup>-</sup> )	%	25
Particle density	g/mL	1.08
Shipping density**	g/L	657
	lbs/ft <sup>3</sup>	41

<sup>t</sup> For additional particle size information, please refer to Particle Size Distribution Cross Reference Chart (Form No. 177-01775).

\*\* As per the backwashed and settled density of the resin, determined by ASTM D-2187

## Suggested Operating Conditions

Maximum operating temperature	
OH <sup>-</sup> form	70°C (158°F)
Cl <sup>-</sup> form	100°C (212°F)
pH range	
0–14	
Bed depth, min.	
450 mm (1.5 ft)	
Flow rates:	
Service/fast rinse	5–60 m/h (2–24 gpm/ft <sup>2</sup> )
Service/condensate polishing	40–150 m/h (16–60 gpm/ft <sup>2</sup> )
Backwash	See figure 1
Co-current regeneration/displacement rinse	1–10 m/h (0.4–4 gpm/ft <sup>2</sup> )
Total rinse requirement	
2–5 BV*	
Regenerant:	
Type	4–8% NaOH
Temperature	Ambient or up to 60°C (140°F) for silica removal

\*1 BV (Bed Volume) = 1 m<sup>3</sup> solution per m<sup>3</sup> resin or 7.5 gals per ft<sup>3</sup> resin


## Packaging

25 liter bags or 5 cubic feet fiber drums

## Hydraulic Characteristics

Figure 1 shows the bed expansion of DOWEX™ MONOSPHERE 550A (OH) as a function of backwash flow rate and water temperature. Figure 2 shows the pressure drop data for DOWEX MONOSPHERE 550A (OH) as a function of service flow rate and water temperature. Pressure drop data are valid at the start of the service run with clear water and a correctly classified bed.

**Figure 1. Backwash Expansion Data**

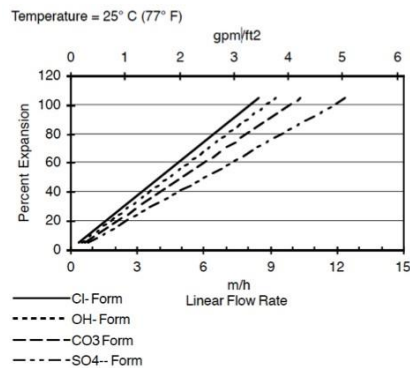


**For other temperatures use:**

$$F_T = F_{77°F} [1 + 0.008 (T_{iF} - 77)], \text{ where } F = \text{gpm/ft}^2$$

$$F_T = F_{25°C} [1 + 0.008 (1.8T_{iC} - 45)], \text{ where } F = \text{m/h}$$

**Figure 2. Pressure Drop Data**

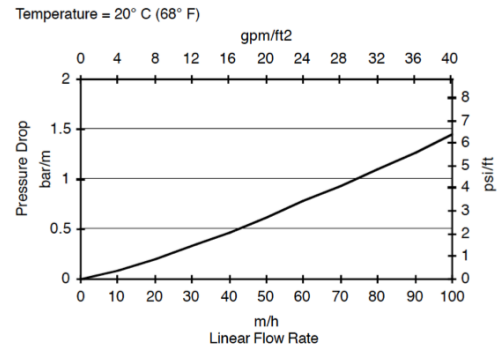

**For other temperatures use:**

$$P_T = P_{20°C} / (0.026 T_{iC} + 0.48), \text{ where } P = \text{bar/m}$$

$$P_T = P_{68°F} / (0.014 T_{iF} + 0.05), \text{ where } P = \text{psi/ft}$$

## Product Stewardship

Dow has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with Dow products - from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

## Customer Notice

Dow strongly encourages its customers to review both their manufacturing processes and their applications of Dow products from the standpoint of human health and environmental quality to ensure that Dow products are not used in ways for which they are not intended or tested. Dow personnel are available to answer your questions and to provide reasonable technical support. Dow product literature, including safety data sheets, should be consulted prior to use of Dow products. Current safety data sheets are available from Dow.

### For more information, contact our Customer Information Group:

Asia Pacific	+86 21 3851 4988
Europe, Middle East, Africa	+31 115 672626
Latin America	+55 11 5184 8722
North America	1-800-447-4369

[www.dowwaterandprocess.com](http://www.dowwaterandprocess.com)

**WARNING:** Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

**NOTICE:** No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

"All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. Nothing in this document should be treated as a warranty by Dow.

